

Lancaster 05 PAS 68 Bollard

Bollards | Jacksons Security

Jacksons Fencing


Stowting Common | Ashford | TN25 6BN

www.jacksons-security.co.uk

+44 (0) 1233 750 393

JFS | MKT/SPC | 0613 | V2

Jacksons
Quality that lasts
Fencing & Access Solutions

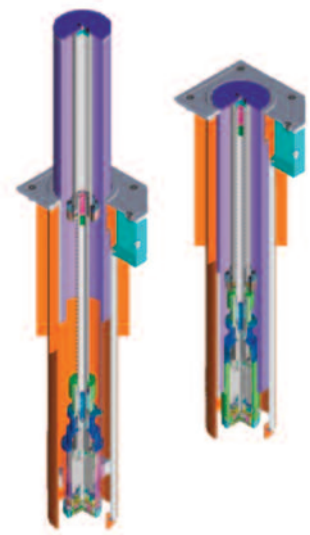

Applications

✓ Airports ✓ High Risk Areas ✓ Secured Compounds ✓ Government Buildings ✓ Gated Facilities

- Impact Resistance PAS 68 V/7500(N2)/80/90:7.3/21.4
- Designed as a 6.8 Ton (15000 lbs) @ 80 Kph (50 MPH) barrier.
- Dimensions:(D) 270mm (11") * (H) 900mm (36")
- Excavation Depth: up to 2000mm (84")
- Optional LED lighting

Features

- Modern look and feel
- 4 seconds operation up
- 2 Seconds down
- All weather conditions.
- Option to operate each bollard separately
- Power supply: 120V, 208V, 230V, 240V, 380V Options
- Operational during power shortage

Finish Options

- Galvanised as standard
- Optional Finishes: Powder Coating, Paint, or Stainless steel



JF 05 PAS 68