


HEAVY DUTY BARRIERS

JSW125 Issue 02

**Jacksons
Fencing**

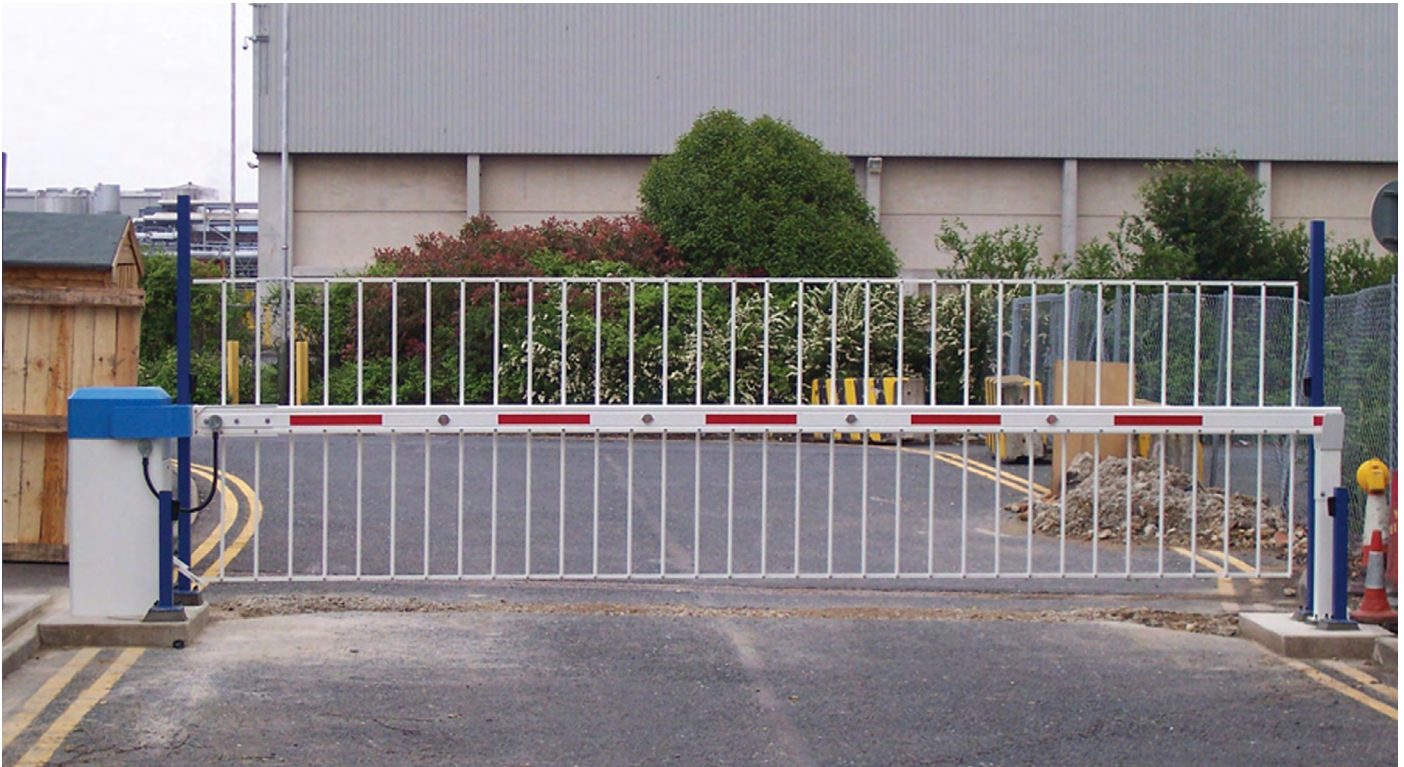

- 543065 Jacksons HD 50 barrier >5m Maximum 360 operations in one hour with a maximum of 8600 per day. Opening time 4 secs
- 543066 Jacksons HD 60 barrier >6m Maximum 275 operations in one hour with a maximum of 6600 per day. Opening time 5.5 secs
- 543068 Jacksons HD 80 barrier >8m Maximum 425 operations in one hour with a maximum of 4400 per day. Opening time 8.4 secs
- 543076 Jacksons HD 9 barrier >9m Maximum 180 operations in one hour with a maximum of 4300 per day. Opening time 9 secs

Operative Range

Application for:

- Parking area
- Parking garage
- Company entrance
- Safety area

Drive pulse from:

- Push button, card reader, key switch
- Remote control, desk top panel
- Hands free data-capture
- Inductive loop

Technical Information

Mains Supply	230V /50HZ
Max. current	2.5A (max)
Duty cycle	100%
Temperature range	-10°C to +70°C
Controller	MO 63
Foundation (frost-proofed)	550 x 500 x 800mm
Boom connector	left or right
Housing	Aluminium
Mechanical parts	Steel, zinc coated
Drawn power	0.26kW
Running time	Ca 2.3s
Effective length	2780mm
Reversing on obstacle	Switchable

Safety

- Reversing on obstacle
- Best protecting against vandalism
- Ergonomic emergency release