


WARDEN SWING BARRIER

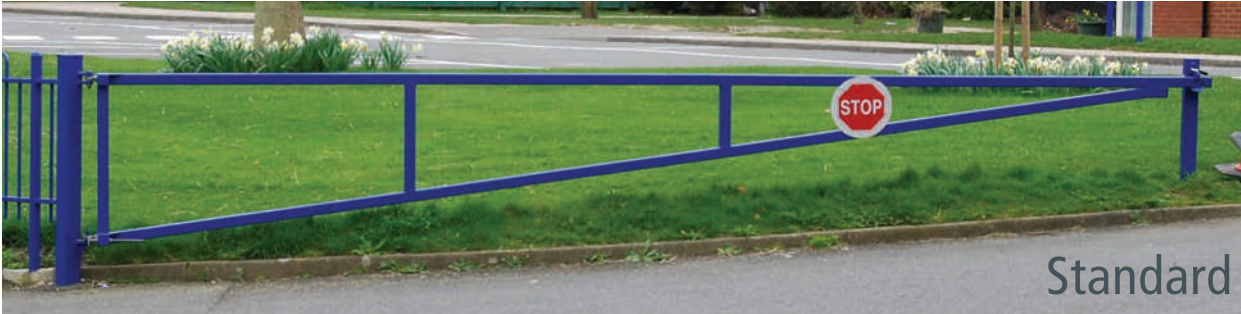

Our Warden Swing Barriers are available in both standard and heavy duty construction, making them suitable for a wide range of applications. Standard warden barriers are constructed using 60 x 60mm square hollow section (SHS), heavy duty warden barriers are constructed using 80 x 80mm SHS. Barriers come with anti-tamper hinges, and are padlockable in the open or closed position.

- Able to lock by padlock (open and closed position)
- Hold open posts are recommended so you can securely lock the barrier in its open position
- Option of stop or no entry signs available

Standard Warden Swing Barrier	WIDTH (MM)	SLAM POST (MM)	HANGING POST (MM)
SINGLE BARRIER	3000 - 8000	80 x 60	100 x 100
	8100 - 9000	80 x 60	150 x 150
DOUBLE BARRIER	5500 - 12,000	80 x 60	100 x 100
	12,200 - 18,000	80 x 60	150 x 150

Heavy Duty Warden Swing Barrier	WIDTH (MM)	SLAM POST (MM)	HANGING POST (MM)
SINGLE BARRIER	3000 - 5000	100 x 100	150 x 150
	5100 - 8000	100 x 100	200 x 200

POST OPTIONS

- Overlength set in concrete as standard
- Baseplated to bolt down onto concrete

FINISHES

- Hot dip galvanised to BS EN 1461 as standard
- Hot dip galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or estuary

STANDARD COLOURS

- Green RAL 6005, Black RAL 9005, Blue RAL 5010, Red RAL 3020, Yellow RAL 1018, White RAL 9010, Grey RAL 7012, Brown RAL 8017, Blue BS 20-C-40
- Architectural grade powder coating
- Other colours on request