


DO NOT SCALE – IF IN DOUBT ASK

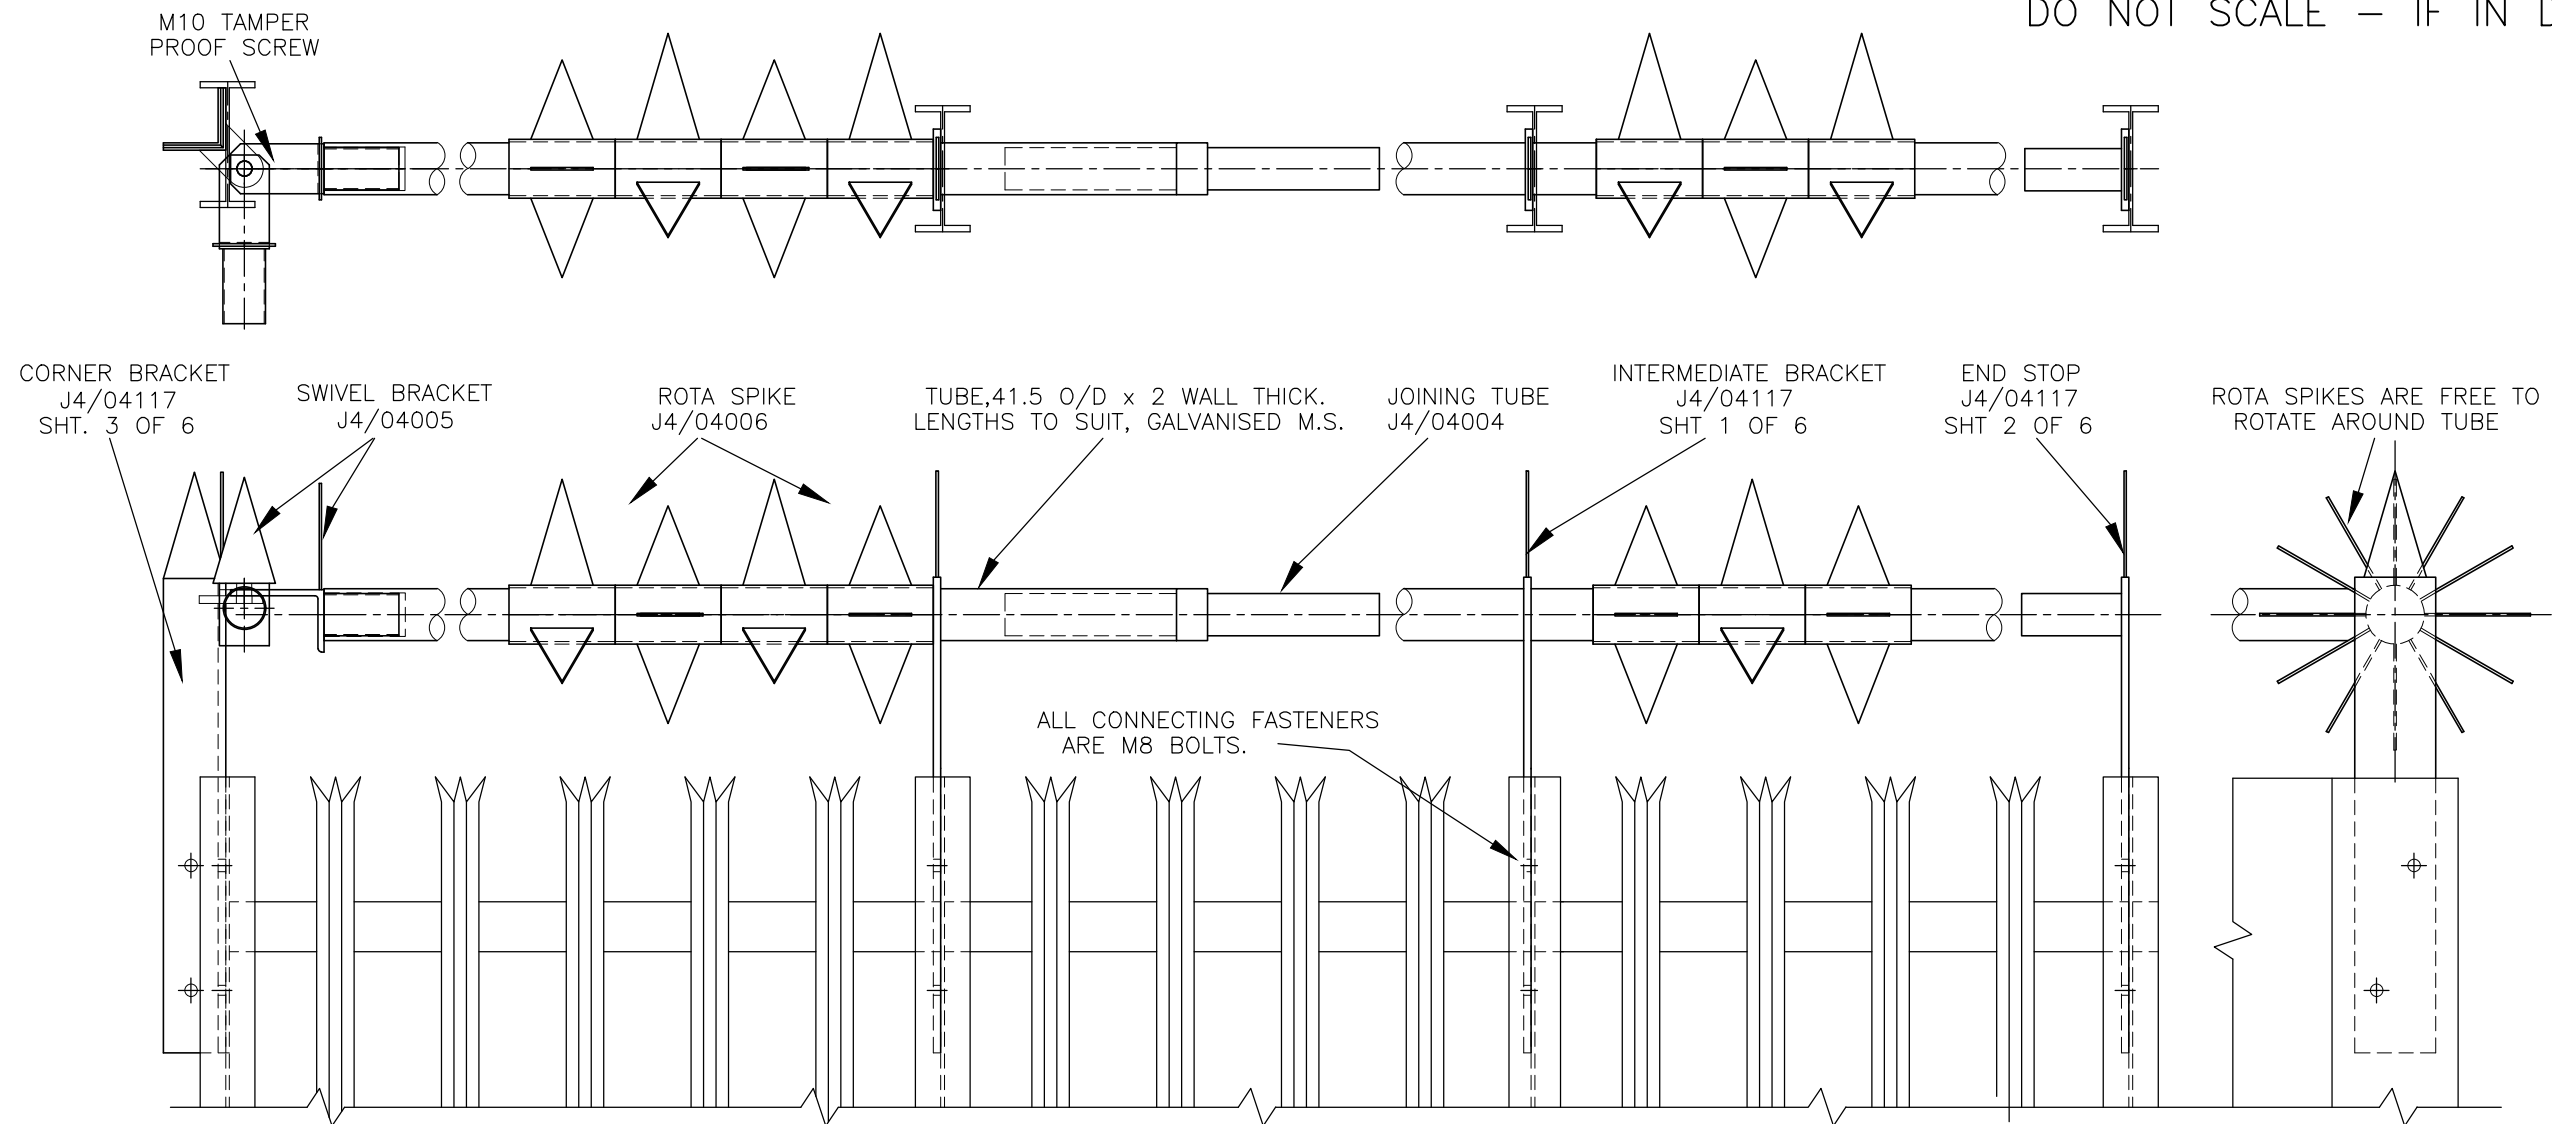

NOTES.

ALL DIMENSIONS ARE IN mm (U.N.O)

Finish.

GALVANISED TO BS EN ISO 1461:1999
POWDER COATED IF REQUIRED

CUSTOMERS REQUIREMENTS			
DESCRIPTION	No. REQ'D	No. OFF BASE FIXINGS PER BRACKET	TOTAL BASE FIXINGS REQ'D
CORNER BRACKET C/W M10 x 30 LONG RESISTROX SCREW		2	
END STOP		3	
INTERMEDIATE BRACKET		2	
JOINING TUBE			
SWIVEL BRACKET			
ROTA SPIKE			
41.5 O/D x 1.75 WALL THICK. GALVANISED M.S. TUBE			

Jacksons
FINE FENCING

Stowting Common
Near Ashford,
KENT. TN25 6BN
Telephone : 01233 750393
Fax: 01233 750403
Int. Tel : +44 (0)1233 750393

This Drawing Is The Property Of H.S. Jackson & Son (Fencing) Ltd.
And May Not Be Copied Or Reproduced In Any Way Without Prior Written Permission.

② 28/03/19
① 02/12/15
① 12/06/06

Top Rail Updated
Rota spikes updated
Original Issue

Drawn SL
Date 12/06/06
Checked
Size A3 Scale N.T.S U.O.S

TITLE
STANDARD ROTA SPIKE
FOR PALISADE FENCING

CUSTOMER
ACK No.

Drawing No.
90 J4/04007
Sheet 3 of 3