

## ROTA SPIKE®

The ultimate fence and gate topping deterrent, Rota Spike® can also be utilised on buildings, to protect vulnerable points, for example windows and roof parapets.

- Supplied 6m lengths or to suit
- Inner tube 41.4mm Ø
- 70 Rota Spike® per tube per 6m
- Fixed at 3m centres (top of wall)
- Fixed at 2m centres (face of wall)
- Spikes to rotate making it impossible to climb over

## VIPER SPIKE®

Viper Spike® represents a new dimension in security - more imposing than barbed wire, it offers a formidable deterrent to the would-be climber. Designed to form a three dimensional barrier, its strong 170mm long 10mm diameter spikes are complete with extremely sharp points.

- 1.1m long
- 40 x 6mm flat bar
- 9 pairs of spikes 10mm diameter
- Width (including spikes) 230mm
- Height 170mm

## VIPER SPIKE® 3


Viper Spike® 3 is designed to prevent intruders from climbing drainpipes or other vertical structures. Available at 200mm wide x 150mm stand-off as standard or made to measure to suit applications.

- 100mm deep x 200mm wide
- 8 pairs of spikes
- 40 x 60mm flat bar

## COBRA SPIKE®

Cobra Spike® security topping is a Secured by Design accredited product designed for use on the tops of fences, gates or walls.

- 1.5m long with 110mm spikes
- Pitch of spikes 80mm and depth of spikes 95mm
- Width of base approximately 50mm

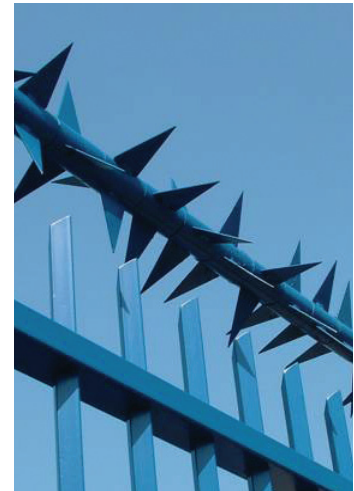

# COBRA SPIKE® ROTARY

Cobra Spike® Rotary is made up of two lengths of modified Cobra Spike® affixed to a 3.0m x 41mm galvanised tube.

- 3.0m long x 180mm wide x 270mm high
- Easy to install
- Virtually impossible to climb over

**We recommend that spikes should be attached to wall and fences at a minimum height of 2.5m, with warning signs every 10m or change in direction.**



## BARBED WIRE AND TAPE

A range of galvanised barbed tape and wire is available to further enhance the perimeter security in different applications whether as a fence and gate topping or in drop zones.

## CONCERTINA RAZOR WIRE

COIL DIAMETER (MM)	DIAMETER WHEN STRETCHED (MM)	APPROX COIL LENGTH (M)	EXTENDED DIAMETER (MM)
450	400	8	400
730	620	10	620
980	820	10	820

## BARBED WIRE ROLL

STRANDS	GAUGE (MM)	APPROX COIL LENGTH (MM)
2	1.7	200

## FLAT BARBED TAPE

COIL HEIGHT (MM)	APPROX COIL LENGTH (MM)
500	14
700	14
900	14