


BARBICAN DEFENDER® XTREME



Barbican Defender® Xtreme projects a powerful visual representation of superior perimeter protection. The curved pales are designed to prevent intruders from climbing or scaling the fence. Barbican Defender® Xtreme features curved pale lengths of 320mm and is ideal for higher security applications. The square hollow section pales are of increased wall thickness; which means their strength more than matches their looks.

- Posts can be customised for Barbed wire / Razor wire / Rota Spike®
- Vertical pale spacing conforms to building regulations for anti-trap
- Unique vandal-proof panel to post connectors
- Panels can be manufactured to accommodate sloping ground
- Anti-climb design
- **25-year service life guarantee**



Post to panel fixings

APPLICATIONS


- ✓ High risk
- ✓ Perimeters
- ✓ Company premises
- ✓ Utilities

PANELS

Constructed as per Barbican® panels but pales are extended and cranked 320mm from the top rail, with each one cut at 45 degrees to form a point.

GATES

Matching gates available

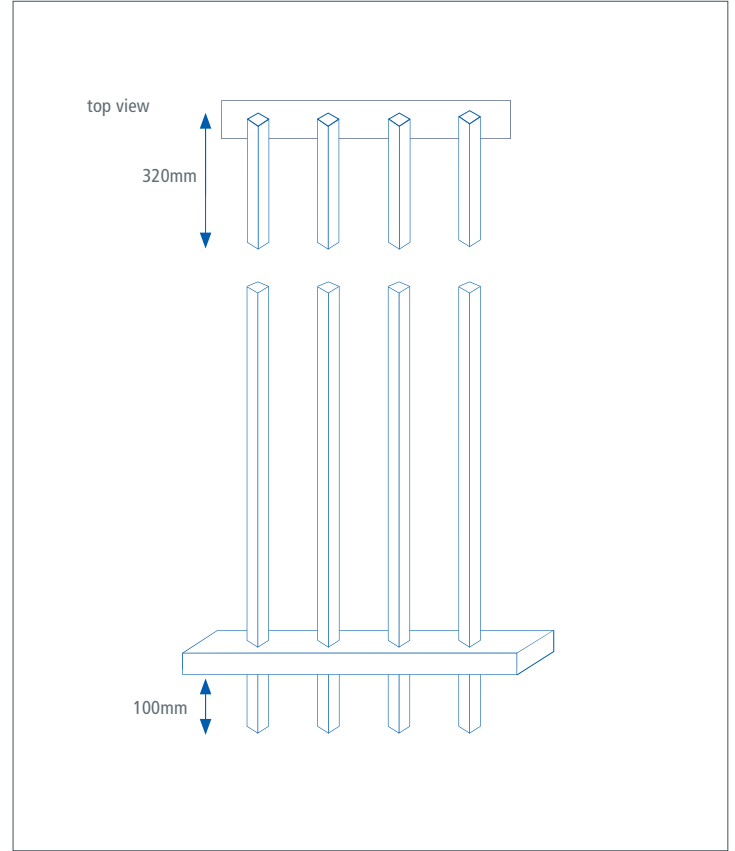

HEIGHT (MM)	POST CENTRES (MM)	POST DIMENSIONS (MM)	OVERALL POST LENGTH (MM)
2250	2484	80 x 60	3050
2500	2484	80 x 60	3300
3000	2484	80 x 60	3800

POST OPTIONS

- Overlength set in concrete as standard
- Baseplated to bolt down onto concrete
- Cranked to suit wall mounting

FINISHES

- Hot dip galvanised to BS EN ISO 1461 as standard
- Hot dip galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

STANDARD COLOURS

- Black RAL 9005
- Green RAL 6005
- Other colours are available on request