


BARBICAN® FENCING



Barbian® features our welded pale-through-rail construction which means there are no bolts to be forced or palings to be removed. The horizontal rails are sleeved on to the upright posts to provide a strong, seamless design with a smart appearance.

- Posts can be customised for Barbed wire / Razor wire / Rota Spike® / Alarm-aFence®
- Vertical pale spacing conforms to building regulations for anti-trap (96mm gap)
- Unique vandal-proof panel to post connectors
- Panels can be manufactured to accommodate sloping ground
- Suitable for almost any application from decorative and secure to highly secure
- Anti-climb design
- **25-year service life guarantee**



Post to panel fixings

APPLICATIONS

- ✓ Perimeters
- ✓ Schools
- ✓ Commercial premises

PANELS


Barbian® panels are up to 3000mm high and have two horizontal hollow sections rails 60 x 40mm (3 rails if 3000mm high). Vertical rectangular hollow section 25 x 25mm pales are passed through the rails with standard spacing at 129mm centres. The tops of pales are cut at 45 degrees and left open as standard to form a point.

GATES

Matching gates available

FINIAL OPTION



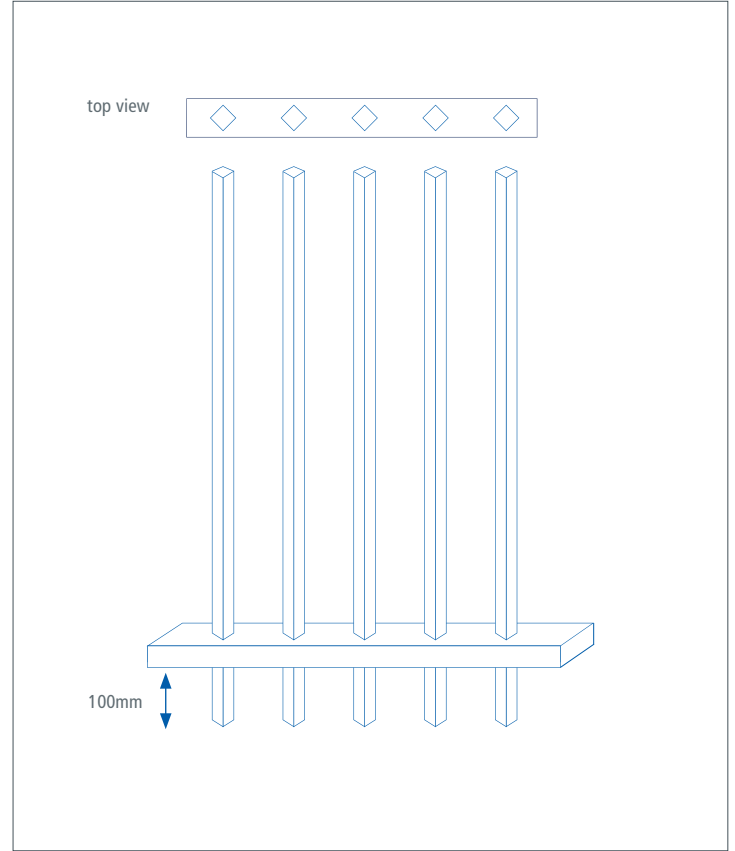

HEIGHT (MM)	POST CENTRES (MM)	POST DIMENSIONS (MM)	OVERALL POST LENGTH (MM)
1000	3000	60 x 60	1600
1250	3000	60 x 60	1800
1500	3000	60 x 60	2100
1800	3000	60 x 60	2500
2000	3000	60 x 60	2800
2500	3000	80 x 60	3300
2900	2484	80 x 60	3700
3000	2484	80 x 60	3800

POST OPTIONS

- Overlength set in concrete as standard
- Baseplated to bolt down onto concrete
- Cranked to suit wall mounting

FINISHES

- Hot dip galvanised to BS EN ISO 1461 as standard
- Hot dip galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

STANDARD COLOURS

- Green RAL 6005, Black RAL 9005, Blue RAL 5010, Red RAL 3020, Yellow RAL 1018, White RAL 9010, Grey RAL 7012, Brown RAL 8017, Blue BS 20-C-40
- Architectural grade powder coating
- Other colours on request