

TriGuard Gates

Vertical Bar Railings | Jacksons Security

Jacksons Fencing

Stowting Common | Ashford | TN25 6BN

www.jacksons-security.co.uk

+44 (0) 1233 750 393

JFS | MKT/SPC | 0610 | V1


Jacksons
Quality that lasts
Fencing & Access Solutions



Cantilever Sliding Gate



Standard Lock

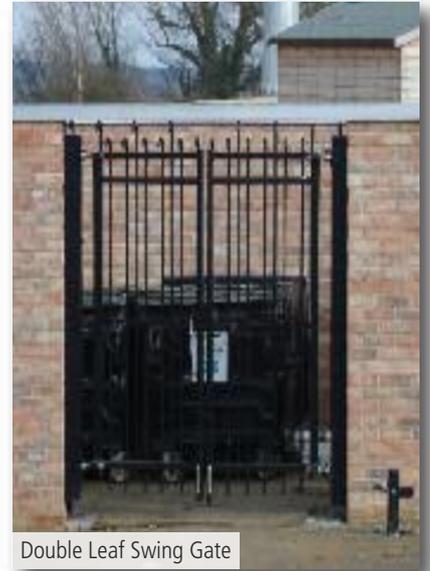

Double Leaf Swing Gate

Tri-Guard Single and Double Swing Gates

Tri-Guard swing and sliding gates are a perfect match to Tri-Guard fencing sharing the unique triple pale design feature and fully welded pale-through-rail construction.

Available as single and double swing gates with manual operation or automated with underground, swing arm or safety-glide in-stile operators. Single and double sliding gates available in cantilever, tracked and telescopic designs as manually operated or with fully automated operation.

Tri-Guard Cantilever Sliding Gates

Tri-Guard Cantilever Sliding Gates are ideal for applications where space may be restricted, the ground unlevel, or where a substantial single gate would provide higher levels of security.

The gates are smooth and virtually silent in operation and supported on a special carriage so that a single leaf is able to span widths of up to 15m over track, road, rail or even water.

Gate panels are constructed to the same exacting standards as Tri-Guard fencing and are mounted on a substantial bottom rail of formed steel with square section steel support posts.



TriGuard Gates

Swing Gates

- Available in a range of standard widths up to 10m and heights to 3m for pedestrian and vehicular access
- Single gates are supplied as right hand hanging, opening inwards (unless specified) and are complete with key lock, handles and gate stop
- Double gates are supplied complete with key in lock, handles, centre gate stop and drop bolts
- 180° opening, adjustable, tamper-proof hinges
- 3 or 4 rail design subject to leaf width
- 60mm x 40mm rails
- 60mm x 60mm stiles with 2mm wall thickness
- 19mm diameter CHS palings grouped in sets of three
- Square section posts at 100mm, 120mm, 150mm and 250mm subject to size of gate, complete with welded curved spike
- Gate posts supplied to allow 800mm - 1.0m in ground or with base plates for bolting onto concrete
- Pale spacing conforms to Building Regulations
- Suitable for automated operation

Finishes

- Galvanized to BS EN 1461 as standard
- Galvanized and powder coated to BS EN 13438 in one of our standard colours at extra cost
- Powder coated to any other BS and RAL colour to special order

Cantilever Sliding Gate

- Ideal for applications where space is limited or ground obstacles need to be spanned
- Effective operation in applications subject to high wind loading
- Available in a range of standard widths to span up to 30m and in heights to 3m
- Gates to span greater widths available to special order
- Substantial construction ensures safe, reliable operation
- Supplied complete with key in lock and handles
- Heavy duty carriage for smooth, quiet operation
- 3 rails plus substantial formed steel bottom rail design
- 60mm x 40mm rails
- 120mm x 80mm portals
- 19mm vertical palings set in clusters of three
- Portals supplied with base plates for bolting onto concrete
- Pale spacing conforms to Building Regulations for anti-trap
- Posts can be extended to accommodate gate top mounted physical security devices
- Automated operation ready

Tracked Sliding Gates

We are able to supply any Tri-Guard Gate design for tracked sliding operating on level ground if required for exceptionally heavy designs or where a single gate leaf exceeds 12m.

