


EUROGUARD® GATES

Jacksons Fencing

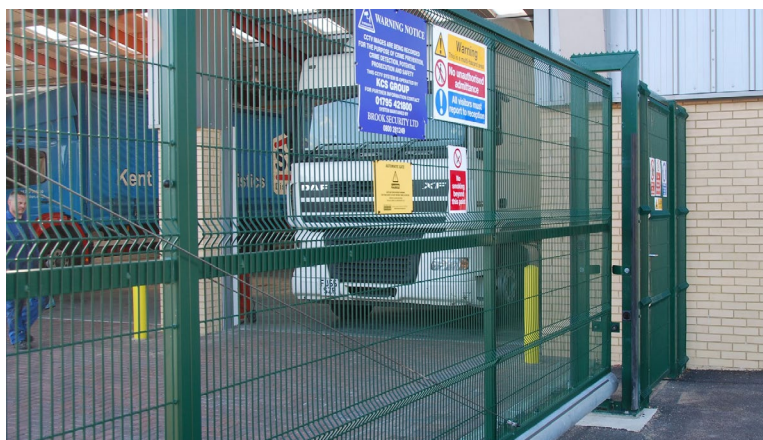

Jacksons' EuroGuard® gates are designed to match our range of EuroGuard® fencing. Available in Flatform Heavy, Regular, Extra, and Combi, they create secure access points with your choice of aesthetic, on their own or used in conjunction with the matching fencing to create a uniform perimeter. Gates can be supplied with manual or automatic operation in swing or sliding styles. All steel and timber gates are supplied with a 25 year guarantee against rust, rot, insect attack, and manufacturing defects.

EuroGuard Regular, Extra, and Flatform Gate Specification:

- Heights available from 1800-3000mm
- Widths available up to 12m wide for swing or sliding
- 60 x 40mm horizontal rails
- Gate posts are square hollow section in three sizes depending on height and width: 100mm, 120mm, 150mm
- Rectangular hollow section hanging and shutting stiles 60 x 60mm, wall thickness 2mm
- Two or three horizontal rails according to height and width. Gate leaves over 3.5m have specially designed bracing across the bottom of the gate for strength.
- Hinges allow gate to swing through an angle of 180 degrees
- One hold open latch and stop clamp for single gates, two hold open latches, centre gate stop, and drop bolt clamp for double gates
- Comes as standard with a slide latch. Key locks and emergency push pads available.
- Single and double leaf available


OPTIONS

- Posts can be dug in or baseplated
- Added security spikes and toppings
- Key lock, emergency exit push pad

FINISHES

- Galvan® zinc alloy coated to BS EN 10244-2:2009 class A as standard
- Powder coated to BS EN 13438 in one of our standard colours at extra cost
- Other colours available on request
- Jakcure® treated timber slats

- Marine coat for installations within 500m of salt water or estuary

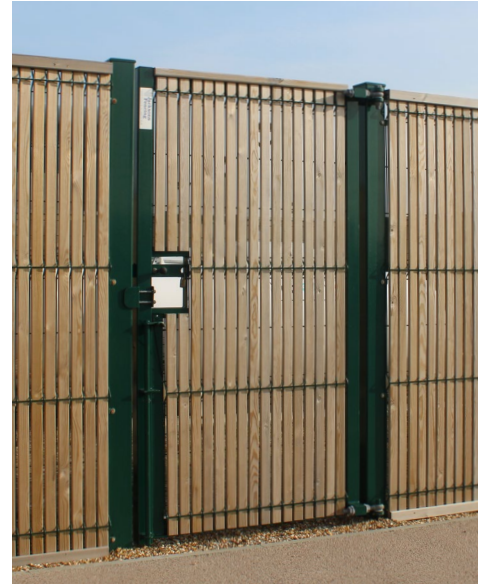

EuroGuard Combi Gate Specification:

- Heights available from 1500-3000mm
- Widths available up to 3m wide for single leaf swing gate and 6m for double leaf swing gate
- 60 x 40mm horizontal rails
- Gate posts are square hollow section in three sizes depending on height and width: 100mm, 120mm, 150mm
- Rectangular hollow section hanging and shutting stiles 60 x 60mm, wall thickness 2mm
- Hinges allow gate to swing through an angle of 180 degrees
- One hold open latch and stop clamp for single gates, two hold open latches, centre gate stop, and drop bolt clamp for double gates
- Comes as standard with a slide latch. Key locks and emergency push pads available.
- Single and double leaf available

AUTOMATION

- Ask our team about automating your gate. All of our gate automation engineers are DHF qualified to a minimum of level 2.

APPROVALS

- LPS 1175 certified gates available, enquire with our team.