

Customer Name:.....
 Sales Order No:.....
 Gate Height:.....
 Gate Width:.....
 Salesman:.....

Jacksons
FINE FENCING
 Established 1947


NOTE: HINGES WILL BE FITTED AS STANDARD UNLESS INDICATED

IF FITTINGS ARE REQUIRED TO BE SUPPLIED SEPARATELY PLEASE TICK BOX.....

Narrow Entrance Gate

Specification (0.9m - 1.2m Wide)
 Single cross braced. Gates are 1.2m high except for the curved hanging stile which is 1.5m and slam stile 75 x 75mm. Top rail is 100 x 75mm.

If gates are automated with underground operators, bottom rail is increased to 75 x 95mm, with stiles cut back to suit.

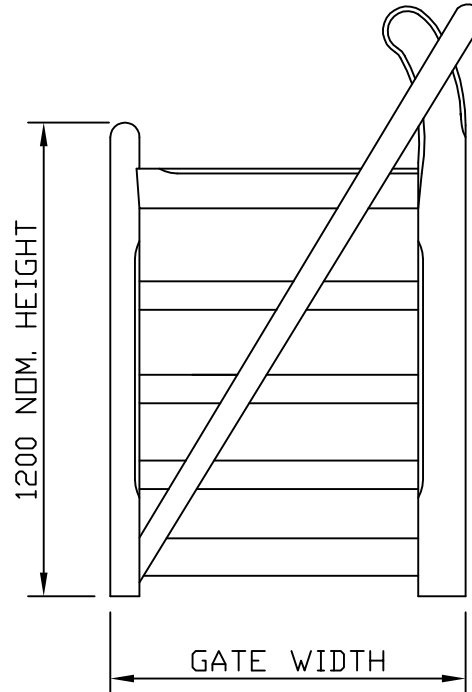

VIEWED FROM OUTSIDE
 GATE RIGHT HAND HANGING.
 PLEASE STATE HAND REQUIRED.
 (AUTOMATED)

- All timber used through out is superior quality Jakcured softwood guaranteed for 25 years
- The timber is machined to a standard size, stop chamfered and planed
- All rail and cross bracings are bolted with stainless steel bolts
- All joints are morticed and tenoned
- Traditional attractive designs

DO NOT SCALE – IF IN DOUBT ASK

Jacksons
FINE FENCING

Stowting Common
 Near Ashford,
 KENT. TN25 6BN
 Telephone : 01233 750393
 Fax: 01233 750403
 Int. Tel : +44 (0)1233 750393

This Drawing Is The Property Of H.S. Jackson & Son (Fencing) Ltd.
 And May Not Be Copied Or Reproduced In Any Way Without Prior Written Permission.

Drawn	WB	TITLE	
Date	13/11/04	NARROW ENTRANCE GATE RIGHT HAND HANG (AUTOMATED)	
Checked		CUSTOMER	Drawing No.
Size	A3	Scale	04 J7/02090
		ACK No.	Sheet 2 of 4