


# SECURI-MESH® PLUS B3 (SR2)



The Securi-Mesh® Plus B3 (SR2) rated system provides an ideal solution for a wide variety of higher security perimeter applications with its double layer of '358' mesh and small apertures which eliminate foot and finger holds, and prevent objects from being passed through. The vertical steel clamp bars employed in the panel to post fixing and to bond the mesh layers together, provide increased rigidity to the design and make the system particularly resistant to cutting through using conventional hand and portable power tools.

- LPS 1175 B3 (SR2) Approved
- Secured by Design Preferred Specification
- Stainless steel fixings
- Jaktronic® PIDS compatible
- **25-year service life guarantee**

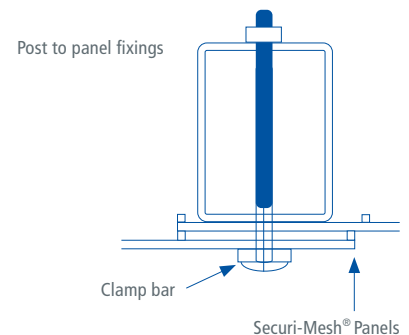

## APPLICATIONS


- ▶ High risk
- ▶ Perimeters
- ▶ Utilities sites

## PANELS

The Securi-Mesh® Plus B3 (SR2) has staggered double skin of 76.2mm x 12.7mm resistance mesh welded at each intersection up to 5000mm only. Second panel is an internal skin only, single skin then from 2200mm upwards.

## GATES

B3 (SR2) gates available

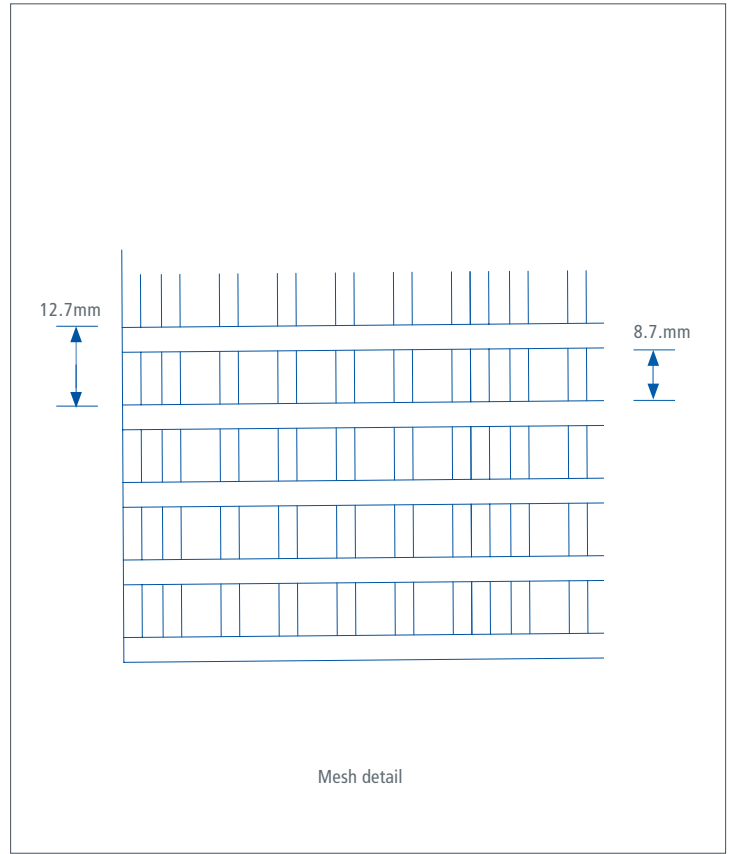

HEIGHT (MM)	POST CENTRES (MM)	POST DIMENSIONS (MM)	OVERALL POST LENGTH (MM)
From 2442 to 5000	2451	TO SUIT SITE	TO SUIT SITE

## FINISHES

- Panels are Galfan® zinc alloy coated to BS EN 10244-2:2009 class A
- Galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

## STANDARD COLOURS

- Black RAL 9005
- Green RAL 6005
- Other colours are available on request

## APPROVALS

LPS 1175 B3 (SR2)

