


SECURI-MESH® PLUS



Securi-Mesh® Plus features anti climb double layer mesh panels with small apertures to eliminate foot and finger holds, preventing objects being passed through. The system is particularly effective against the use of conventional hand and portable power cutting tools.

- Posts can be customised for Barbed wire / Razor wire / Rota Spike® / Alarm-aFence®
- Double skin mesh panels with wire welded at every intersection - two mesh panels bolted together, one rotated 90°
- Overlapped by a minimum of 75mm at posts to maintain integrity of protection
- Mesh spacing conforms to Building Regulations for anti-trap
- Anti-climb design
- Can be stepped to accommodate sloping ground
- **25 year service life guarantee**

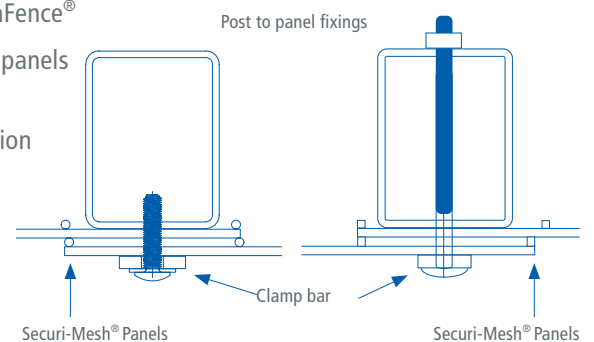

APPLICATIONS



- ✓ Utilities
- ✓ High risk
- ✓ Secure compounds

PANELS

Double skin of 76.2mm x 12.7mm resistance mesh up to 2400mm only. Second panel is an internal skin only, single skin then from 2400mm upwards.

GATES

Matching gates available

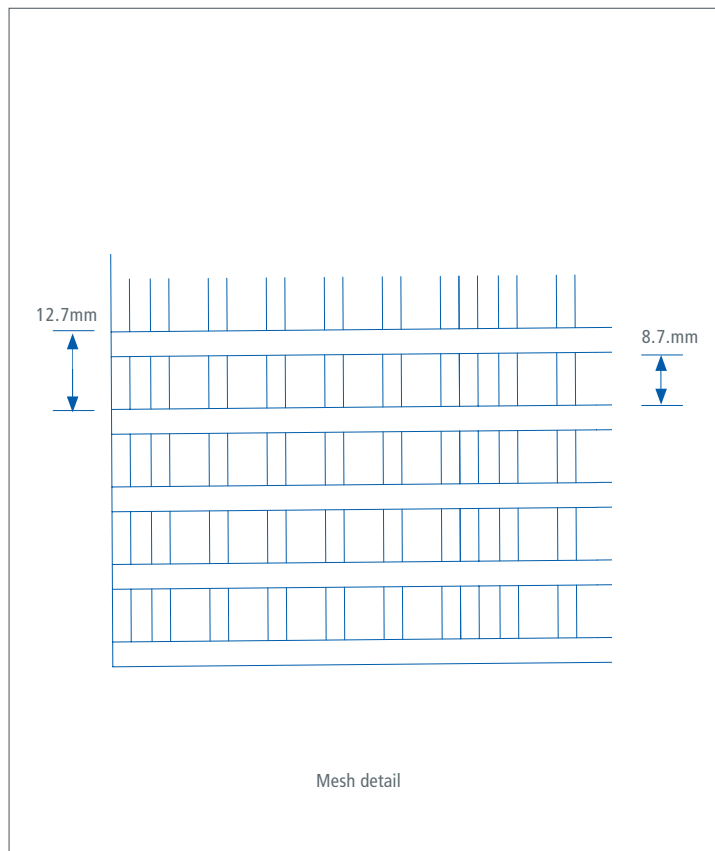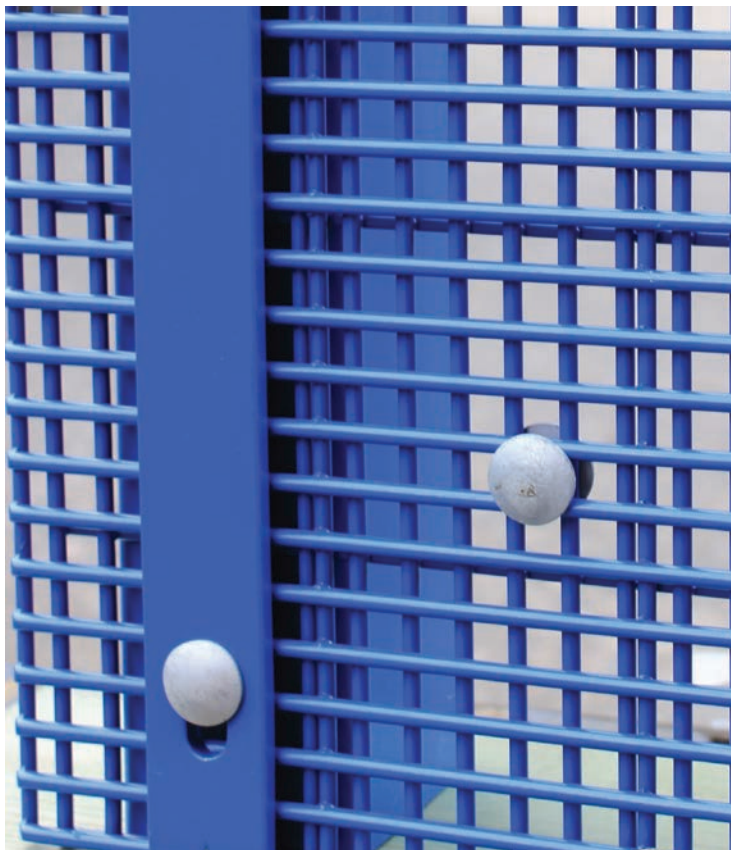

HEIGHT (MM)	POST CENTRES (MM)	POST DIMENSIONS (MM)	MESH	
1270 - 5200	2440	Dimensions to suit fence height and location	Double skin of 76.2 x 12.7mm resistance mesh welded at each intersection, providing apertures of 8.7 x 8.7mm	Double clad only up to 2515mm high, single clad above 2515mm

POST OPTIONS

- Overlength set in concrete as standard
- Baseplated to bolt down onto concrete
- Cranked to suit wall mounting

FINISHES

- Panels are Galfan® zinc alloy coated to BS EN 10244-2:2009 class A
- Galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

STANDARD COLOURS

- Black RAL 9005
- Green RAL 6005
- Other colours are available on request