

Customer Name:.....
 Sales Order No:.....
 Gate Height:.....
 Gate Width:.....
 Salesman:.....



NOTE: HINGES WILL BE FITTED AS STANDARD UNLESS INDICATED

IF FITTINGS ARE REQUIRED TO BE SUPPLIED SEPARATELY PLEASE TICK BOX.....

Wide Entrance Gate

Specification (Above 3.0m Wide)
 Gates are 1.2m high except for the curved hanging stile which is 1.5m 125 x 75mm. Slam stile is 75 x 75mm. Top rail is 100 x 75mm and under rail and cross braces 75 x 25mm. Supplied in natural jakcured finish.

If gates are automated with underground operators, bottom rail is increased to 75 x 75mm, with stiles cut back to suit.

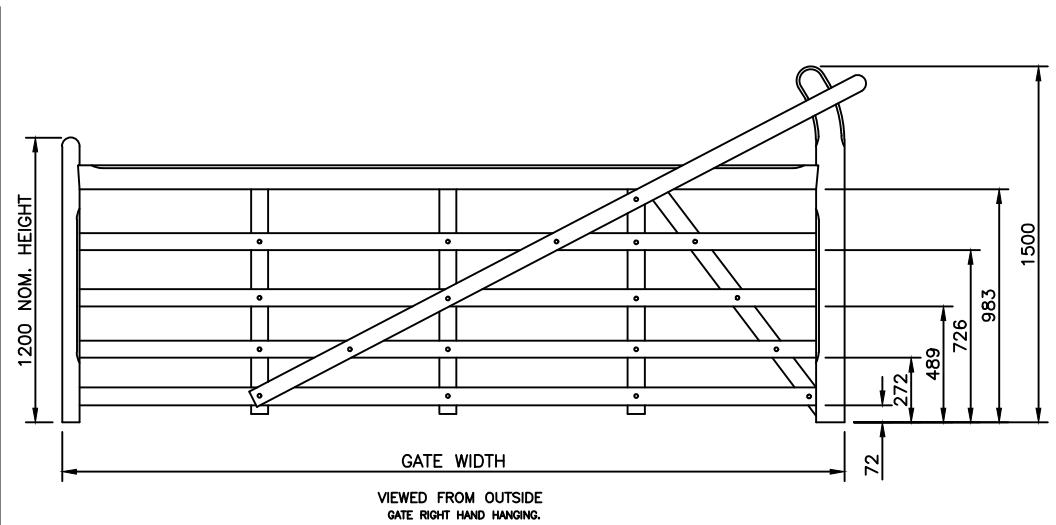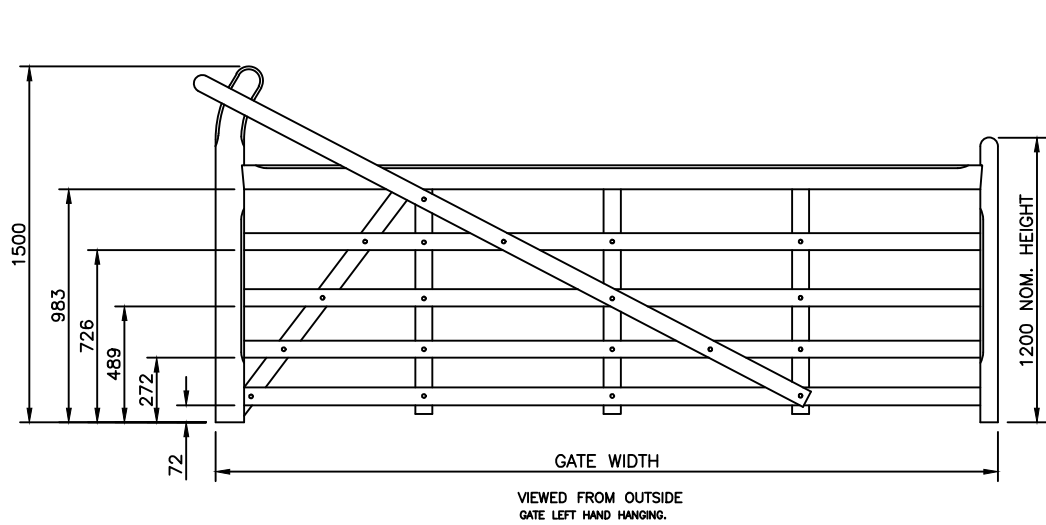

Manufacture Tolerance +/-3mm

- All timber used through out is superior quality Jakcured softwood guaranteed for 25 years
- The timber is machined to a standard size, stop chamfered and planed
- All rail and cross bracings are bolted with stainless steel bolts
- All joints are morticed and tennoned
- Traditional attractive designs

DO NOT SCALE – IF IN DOUBT ASK



Stowting Common, Near Ashford, Kent. TN25 6BN
 Telephone: 01233 750393
 Fax: 01233 750403
 www.jacksons-fencing.co.uk
 www.jacksons-security.co.uk

- ③ 08/11/18 Rail Pitch Dims Added
- ② 13/02/06 Auto Note Added
- ① 13/11/04 UPDATE

Drawn	WB	TITLE	WIDE ENTRANCE GATE (STANDARD)
Date	13/11/04	CUSTOMER	Drawing No.
Checked		ACK No.	04 J7/02094
Size	A3	Scale	NTS U.O.S
			Sheet 7 of 7

This Drawing Is The Property Of H.S. Jackson & Son (Fencing) Ltd, And May Not Be Copied Or Reproduced In Any Way Without Prior Written Permission.