


BARBICAN® SR1

Jacksons
Guaranteed Quality since 1947



Our Barbican® SR1 LPS 1175 systems feature a welded pale-through-rail construction for strength and security integrity. Barbican® SR1 is an ideal option for commercial properties, city schools, or great for architects who want a minimalist contemporary fence which meets LPS 1175 standard set by the Loss Prevention Certification Board (LPCB).

- LPS 1175 SR1 Approved
- Secured by Design Preferred Specification
- Fully welded pale-through-rail construction
- Seamless, concealed vandal proof rail to post fixing
- Anti-climb design
- 25-year service life guarantee



Post to panel fixings

APPLICATIONS


- ✓ Schools
- ✓ Perimeter security
- ✓ Commercial premises

PANELS

Barbican® SR1 panels are up to 3000mm high and have two horizontal hollow section rails 60 x 40mm (3 rails if 3000mm high). Vertical rectangular hollow section 25 x 25mm pales are passed through the rails with standard spacing at 129mm centres. The tops of pales are cut at 45 degrees and left open as standard to form a point.

GATES

SR1 gates available

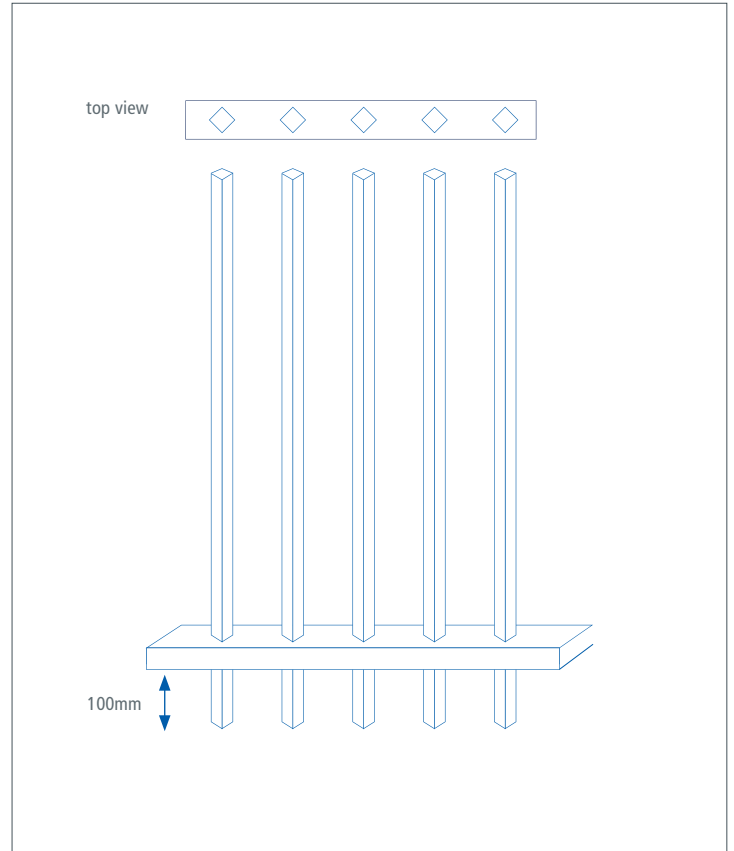

HEIGHT (MM)	POST CENTRES (MM)	POST DIMENSIONS (MM)	OVERALL POST LENGTH (MM)
1800	3000	60 x 60	2500
2000	3000	60 x 60	2800
2500	3000	80 x 60	3300
3000	2484	80 x 60	3800

FINISHES

- Hot dip galvanised to BS EN ISO 1461 as standard
- Hot dip galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

STANDARD COLOURS

- Black RAL 9005
- Green RAL 6005
- Other colours are available on request

APPROVALS

LPS 1175 SR1

