

## SECURI-MESH® SWING GATES



Green Double Leaf Swing Gate – Manual

Our Securi-Mesh® gates provide high-security performance with anti-climb welded mesh, available in custom heights up to 3m to meet your specifications. Offering durability, visibility, and corrosion resistance, they are ideal for providing controlled entry to sensitive sites, and perfectly match our Securi-Mesh® fence panels.

### Features

- Available in a range of standard widths up to 10m and heights to 3m for pedestrian and vehicular access
- Horizontal rails for gates are 60 x 40mm
- Single or double leaf options available
- Manual or automated operation
- Complete with tamper-proof hinges that allow the gate to swing through an angle of 180 degrees (manual only)
- Square hollow section gate posts made in three sizes; 100mm, 120mm and 150mm depending on the gate height and width
- Additional bracing depending on height and width

### POST OPTIONS


- Over length set in concrete as standard
- Base plated to bolt down onto concrete

### FINISHES

- Hot dip galvanised to BS EN ISO 1461 as standard
- Hot dip galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

### STANDARD COLOURS

- Green RAL 6005, Black RAL 9005, Blue RAL 5010, Red RAL 3020, Yellow RAL 1018, White RAL 9010, Grey RAL 7012, Brown RAL 8017, Blue BS20-C-40
- Architectural grade powder coating
- Other colours on request

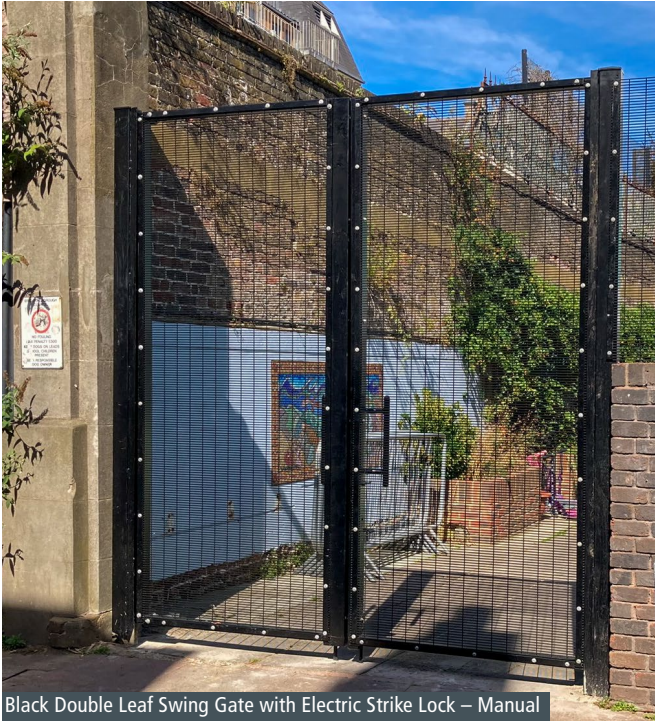

Black Double Leaf Swing Gate with Electric Strike Lock – Manual



Green Single Leaf Swing Gate with Electric Strike Lock – Manual



Green Single Leaf Swing Gate with Slide Latch – Manual

## Locking Options

- Slide latch (as standard)
- Key lock
- Mechanical coded lock
- Push pad latch
- Electric strike lock
- Magnetic latch

## OPTIONS

- Manual
- Automated

## AUTOMATION

- Ask our team about automating your gate. All of our gate automation engineers are DHF qualified to a minimum of level 2.