

SENTRY® SWING GATES



Red Double Leaf Swing Gate – Manual

Sentry® swing gates are a perfect match to Sentry® fencing and share all the principle design features of our welded semi pale-through-rail construction.

Features

- Available in a range of standard widths up to 12m and heights to 3m for pedestrian and vehicular access
- Pales Ø 32mm
- Horizontal rails for all gates are 60 x 40mm
- Single or double leaf options available
- Manual or automated operation
- Complete with tamperproof hinges that allow the gate to swing through an angle of 180 degrees (manual only)
- Square hollow section gate posts made in three sizes; 100mm, 120mm and 150mm depending on the height and width of gate
- Gates over 3.5m long feature additional diagonal bracing struts
- 30mm high, sharp pointed steel security comb on gates over 1.5m high, unless specified

POST OPTIONS


- Over length set in concrete as standard
- Base plated to bolt down onto concrete

FINISHES

- Hot dip galvanised to BS EN ISO 1461 as standard
- Hot dip galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

STANDARD COLOURS

- Green RAL 6005, Black RAL 9005, Blue RAL 5010, Red RAL 3020, Yellow RAL 1018, White RAL 9010, Grey RAL 7012, Brown RAL 8017, Blue BS20-C-40
- Architectural grade powder coating
- Other colours on request

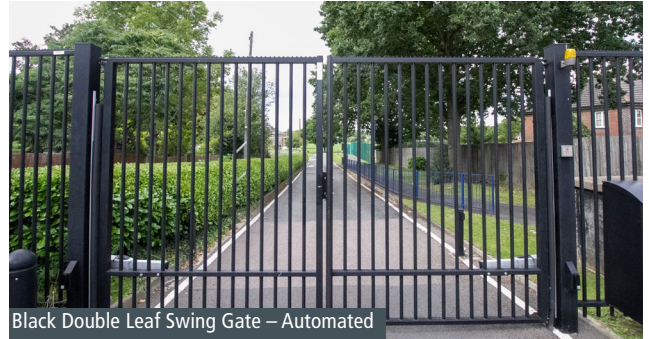

Locking Options

- Slide latch (as standard)
- Key lock
- Mechanical coded lock
- Push pad latch
- Electric strike lock
- Magnetic latch

OPTIONS

- Manual
- Automated

AUTOMATION

- Ask our team about automating your gate. All of our gate automation engineers are DHF qualified to a minimum of level 2.