


UHS HEAVY MESH SR3

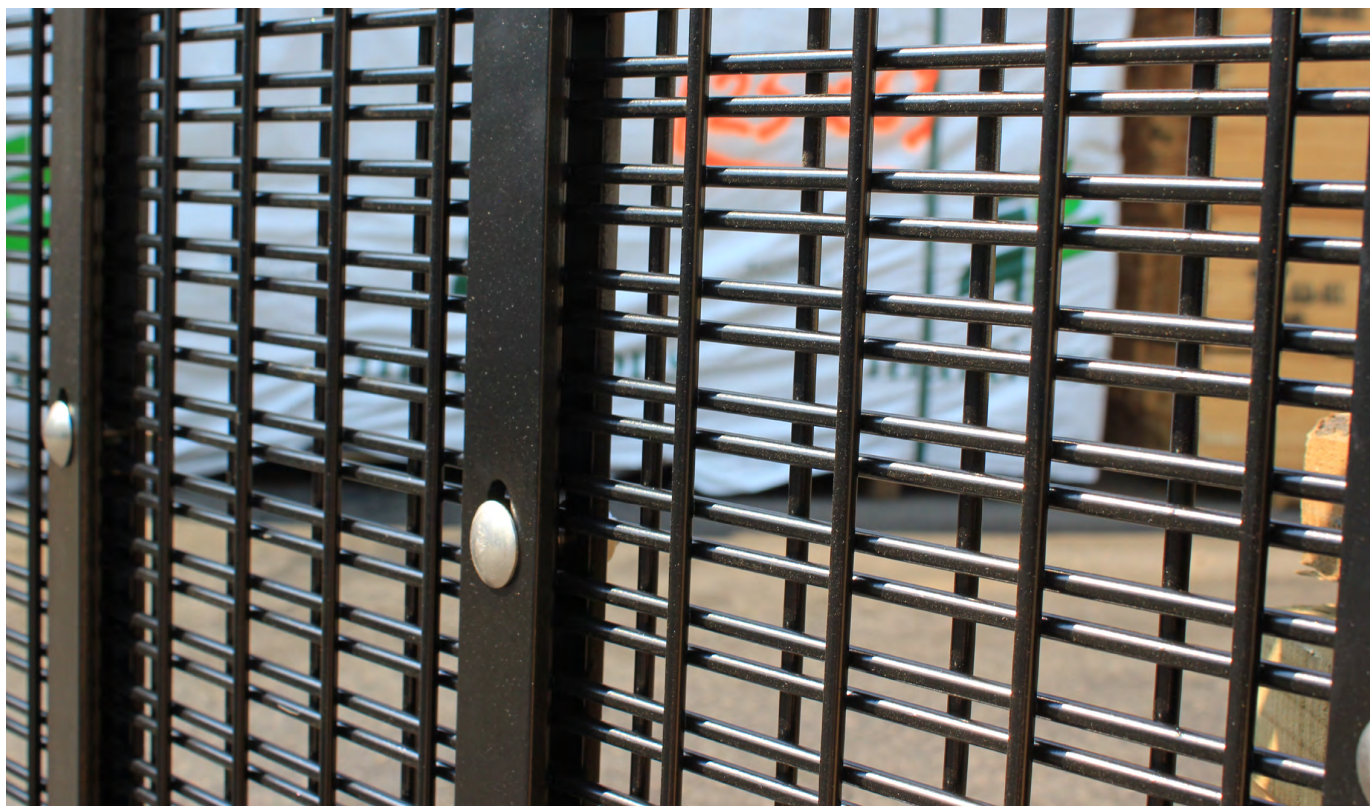

UHS Heavy Mesh SR3 has been designed and tested to withstand forced entry using tools which include battery power tools. The SR3 mesh system is constructed using double skinned mesh with clamp bars added at 250mm centres and anti tamper fixings.

- Heavy gauge wire-welded mesh security fencing system
- LPS 1175 (Issue 7) SR3 Approved
- Secured by Design Preferred Specification
- Double skinned to provide a high level of security
- Designed to be used in high security applications
- Stainless steel fixings
- Anti-climb design
- Double 50 x 28mm mesh - creating a smaller aperture
- Clamp bars fixed at 250mm centres
- Matching gates available

HEIGHT (MM)	POST CENTRES (MM)
2415	2505
3031	2505

POST OPTIONS

- Over length set in concrete as standard
- Base plated to bolt down onto concrete

FINISHES

- Hot dip galvanised to BS EN ISO 1461 as standard
- Hot dip galvanised and powder coated to BS EN 13438
- Marine coat for installations within 500m of salt water or an estuary

STANDARD COLOURS

- Green RAL 6005, Black RAL 9005, Blue RAL 5010, Red RAL 3020, Yellow RAL 1018, White RAL 9010, Grey RAL 7012, Brown RAL 8017, Blue BS20-C-40
- Architectural grade powder coating
- Other colours on request